




The Test Pin (**Figure 2B of IEC 60950**) is intended to verify the protection against access to hazardous live parts in class 0 equipment and class II equipment.

Conforms to:

Standard IEC 61032, IEC 60065, IEC 60335-1, IEC 60950, IEC 60601, IEC 60745 and UL etc.

Technical Parameter:

- Test probe diameter: 3 mm
- Test probe length: 15 mm
- Baffle plate thickness: 4 mm
- Baffle plate diameter: 25 mm
- Handle length: 20 mm
- Handle diameter: 10 mm

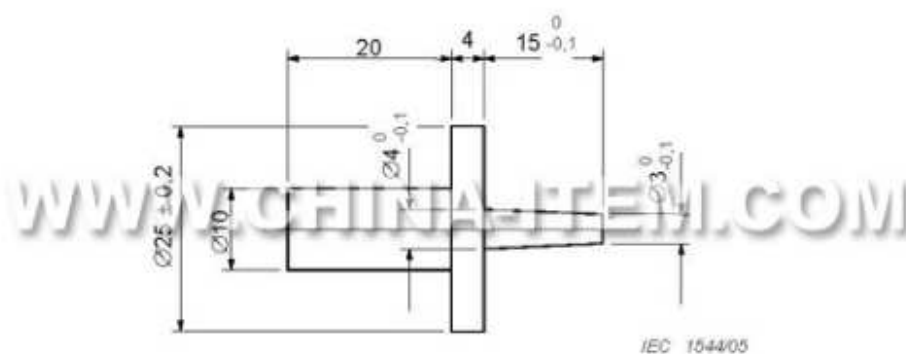

Dimensions in millimetres

The handle dimensions ($\varnothing 10$ and 20) are not critical.

NOTE The test pin dimensions are those given in Figure 9, test probe 13 of IEC 61032. In some cases the tolerances are different.

Figure 2B – Test pin